

Aluminum Electrolytic Type / Surface Mount Type

RoHS compliance

CE-FH Series

Long Life





- 105°C, 2,000 to 5,000hrs.
- Solvent proof (within 2 minutes)

Specifications

Items	Condition	Specifications					
Rated voltage (V)	—	6.3	10	16	25	35	50
Surge voltage (V)	Room temperature	8.0	13	20	32	44	63
Category temperature range (°C)	—	-40 to +105					
Capacitance tolerance (%)	120Hz/20°C	M : ±20					
Dissipation Factor (tanδ)	120Hz/20°C	0.30	0.24	0.20	0.16	0.14	0.14
Leakage current (LC)	μA/after 2minutes (max)	When rated capacitance exceeds 1,000μF, add 0.02 to the value above for each 1,000μF increase.					
Impedance ratio at low temperature	Based the value at 120Hz, +20°C	The greater value of either 0.01CV or 3					
Endurance	105°C rated voltage applied (With the rated ripple current)	Test	φ4 to φ6.3 : 2,000hrs., φ8 to φ10 : 3,000hrs., φ12.5 to φ16 : 5,000hrs.				
		ΔC/C	Within ±25% of the initial value				
		tan δ	≤ 2.5 times the initial specified value				
		LC	≤ The initial specified value				

Marking, Dimensions

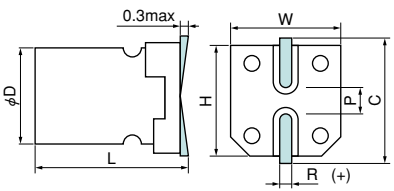

(Unit : mm)

D ^{+0.5max}	L ^{±0.3}	W ^{±0.2}	H ^{±0.2}	C ^{±0.2}	R	P ^{±0.2}
4	6.0	4.3	4.3	5.0	0.5 to 0.8	1.0
5	6.0	5.3	5.3	6.0	0.5 to 0.8	1.4
6.3	6.0	6.6	6.6	7.3	0.5 to 0.8	2.2
6.3	7.7	6.6	6.6	7.3	0.5 to 0.8	2.2
8	10.2	8.3	8.3	9.0	0.7 to 1.0	3.2
10	10.2	10.3	10.3	11.0	1.0 to 1.4	4.6
12.5	13.5 ^{+0.5}	12.8	12.8	13.5	1.0 to 1.4	4.6
16	16.5 ^{+0.5}	16.3	16.3	17.3	1.8 to 2.1	7.0

Size List, Rated Ripple Current

μF	6.3	10	16	25	35	50
1.0						4×6.0 7
2.2						4×6.0 11
3.3						4×6.0 13
4.7				4×6.0 13	4×6.0 15	5×6.0 19
10			4×6.0 18	5×6.0 23	5×6.0 25	6.3×6.0 32
22	4×6.0 22	5×6.0 27	5×6.0 30	6.3×6.0 42	6.3×6.0 44	6.3×7.7 60
33	5×6.0 30	5×6.0 35	6.3×6.0 44	6.3×6.0 58	6.3×7.7 77	8×10.2 140
47	5×6.0 36	6.3×6.0 46	6.3×6.0 60	6.3×7.7 91	8×10.2 150	8×10.2 150
100	6.3×6.0 67	6.3×6.0 62	6.3×7.7 95	8×10.2 150	8×10.2 160	10×10.2 220
220	6.3×7.7 105	8×10.2 175	8×10.2 175	8×10.2 195	10×10.2 290	12.5×13.5 340
330	8×10.2 195	8×10.2 195	8×10.2 210	10×10.2 290	12.5×13.5 380	
470	8×10.2 210	8×10.2 210	10×10.2 290	12.5×13.5 400		16×16.5 610
680		10×10.2 300		12.5×13.5 415		
1000	10×10.2 300		12.5×13.5 440		16×16.5 620	
1500		12.5×13.5 480		16×16.5 720		
2200	12.5×13.5 490		16×16.5 785			
3300		16×16.5 820				
4700	16×16.5 860					

Please refer to page 15 for the ripple current frequency coefficient.

Rated ripple current
mA_{RMS}(120Hz, 105°C)

Case size:φDxL(mm)
16×16.5:CE-FHT

Model No.

