


CE-AX Series

Low Impedance





- 105°C, 1,000 to 2,000hrs.
- Solvent proof (within 2 minutes)

Specifications

Items	Condition	Specifications						
Rated voltage (V)	—	6.3	10	16	25	35	50	
Surge voltage (V)	Room temperature	8.0	13	20	32	44	63	
Category temperature range (°C)	—	-55 to +105						
Capacitance tolerance (%)	120Hz/20°C	M : ±20						
Dissipation Factor (tan δ)	120Hz/20°C	φ4 to φ6.3	0.24	0.20	0.16	0.14	0.12	0.12
		φ8 to φ16	0.28	0.24	0.20	0.16	0.14	0.14
When rated capacitance exceeds 1,000μF, add 0.02 to the value above for each 1,000μF increase.								
Leakage current (LC)	μA/after 2minutes (max)	The greater value of either 0.01CV or 3						
Impedance ratio at low temperature	Based the value at 120Hz, +20°C	-40°C Z/Z _{20°C}	3	2	2	2	2	2
		-55°C Z/Z _{20°C}	5	4	4	3	3	3
Endurance	105°C rated voltage applied (With the rated ripple current)	Test	φ4 to φ6.3, φ10×7.7 : 1,000hrs., φ8 to φ16 : 2,000hrs.					
		ΔC/C	Within ±25% of the initial value					
		tan δ	≤ 2 times the initial specified value					
		LC	≤ The initial specified value					

Marking, Dimensions

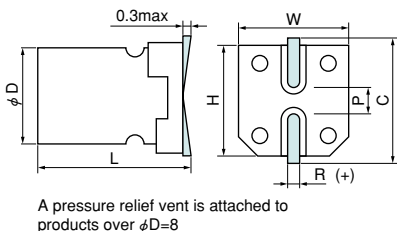

(Unit : mm)

D ^{+0.5max}	L ^{±0.3}	W ^{±0.2}	H ^{±0.2}	C ^{±0.2}	R	P ^{±0.2}
4	6.0	4.3	4.3	5.0	0.5 to 0.8	1.0
5	6.0	5.3	5.3	6.0	0.5 to 0.8	1.4
6.3	6.0	6.6	6.6	7.3	0.5 to 0.8	2.2
6.3	7.7	6.6	6.6	7.3	0.5 to 0.8	2.2
8	10.2	8.3	8.3	9.0	0.7 to 1.0	3.2
10	7.7	10.3	10.3	11.0	1.0 to 1.4	4.6
10	10.2	10.3	10.3	11.0	1.0 to 1.4	4.6
12.5	13.5 ^{±0.5}	12.8	12.8	13.5	1.0 to 1.4	4.6
16	16.5 ^{±0.5}	16.3	16.3	17.3	1.8 to 2.1	7.0

Size List, Impedance, Rated Ripple Current

μF	V	6.3			10			16			25			35			50			
4.7														4x6.0	1.80	80	4x6.0	2.90	60	
10												4x6.0	1.80	80	5x6.0	0.76	150	6.3x6.0	0.88	165
15								4x6.0	1.80	80	5x6.0	0.76	150	5x6.0	0.76	150				
22					4x6.0	1.80	80	5x6.0	0.76	150	5x6.0	0.76	150	5x6.0	0.76	150	6.3x6.0	0.88	165	
27		4x6.0	1.80	80																
33		→			5x6.0	0.76	150	→			6.3x6.0	0.44	230	6.3x6.0	0.44	230	6.3x7.7	0.68	195	
47		5x6.0	0.76	150	→			6.3x6.0	0.44	230	6.3x6.0	0.44	230	6.3x6.0	0.44	230	6.3x7.7	0.68	195	
56		5x6.0	0.76	150							6.3x6.0	0.44	230							
68		→			6.3x6.0	0.44	230	6.3x6.0	0.44	230	6.3x6.0	0.44	230	6.3x7.7	0.34	280				
100		6.3x6.0	0.44	230	→			6.3x6.0	0.44	230	6.3x7.7	0.34	280	8x10.2	0.17	450	8x10.2	0.39	300	
150		6.3x6.0	0.44	230	6.3x6.0	0.44	230	6.3x7.7	0.34	280	8x10.2	0.17	450	→			8x10.2	0.17	450	
220		6.3x6.0	0.44	230	6.3x7.7	0.34	280	6.3x7.7	0.34	280	8x10.2	0.17	450	8x10.2	0.17	450	10x10.2	0.21	450	
330		6.3x7.7	0.34	280	8x10.2	0.17	450	8x10.2	0.17	450	8x10.2	0.17	450	10x10.2	0.090	670	12.5x13.5	0.14	620	
390					→			10x7.7	0.17	450										
470		8x10.2	0.17	450	8x10.2	0.17	450	8x10.2	0.17	450	10x10.2	0.090	670	12.5x13.5	0.066	900				
680		8x10.2	0.17	450	→			10x10.2	0.090	670				12.5x13.5	0.066	900				
1000		8x10.2	0.17	450	10x10.2	0.090	670				12.5x13.5	0.066	900				16x16.5	0.078	790	
1500		10x10.2	0.090	670				12.5x13.5	0.066	900				16x16.5	0.052	1250				
2200					12.5x13.5	0.066	900				16x16.5	0.052	1250							
3300		12.5x13.5	0.066	900				16x16.5	0.052	1250										
4700					16x16.5	0.052	1250													
6800		16x16.5	0.052	1250																




→Use next higher voltage product.
Please refer to page 15 for the ripple current frequency coefficient.

Case size:φDxL(mm)
10x7.7:CE-AXA series
16x16.5:CE-AXT

Impedance(Ω)
max at 100kHz, 20°C

Rated ripple current
mA rms(100kHz, 105°C)

Model No.

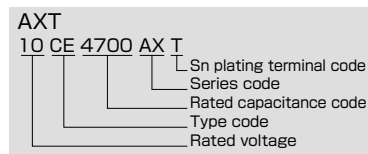

- CE-BJ
- CE-BE
- CE-BD
- CE-BSS
- CE-BS
- CE-FE
- CE-FD
- CE-LD
- CE-FSS
- CE-FU
- CE-FS
- CE-FH
- CE-GA
- CE-AX
- CE-KX
- CE-LX
- CE-LS
- CE-LH
- CE-LL
- CE-PC
- CE-PH
- CE-NP
- CE-FN
- ME-SWB
- ME-UZ·SZ
- ME-UAX·SAX
- ME-LS
- ME-HC
- ME-CZ
- ME-CA
- ME-CX
- ME-AX
- ME-WX
- ME-WA
- ME-WL
- ME-SWG
- ME-WG
- ME-PX
- ME-HPC·HPD
- ME-FC·FD
- ME-FAZ
- ME-FH
- ME-SWN
- ME-HWN