

ME-CA Series

Low Impedance

Miniature




- 105°C, 1,000 to 3,000hrs.
- Solvent proof (within 5 minutes)

Specifications

Items	Condition	Specifications						
Rated voltage (V)	—	6.3	10	16	25	35	50	
Surge voltage (V)	Room temperature	8.0	13	20	32	44	63	
Category temperature range (°C)	—	-55 to +105						
Capacitance tolerance (%)	120Hz/20°C	M : ±20						
Dissipation Factor (tanδ)	120Hz/20°C	0.28	0.24	0.20	0.16	0.14	0.12	
When rated capacitance exceeds 1,000μF, add 0.02 to the value above for each 1,000μF increase.								
Leakage current (LC)	μA/after 2minutes (max)	The greater value of either 0.01CV or 3						
Impedance ratio at low temperature	Based the value at 120Hz, +20°C	-40°C Z/Z _{20°C}	3	3	2	2	2	2
		-55°C Z/Z _{20°C}	6	5	4	4	3	3
Endurance	105°C rated voltage applied (With the rated ripple current)	Test	φ5 to φ8 : 1,000hrs., φ10 : 2,000hrs., φ12.5 to φ16 : 3,000hrs.					
		ΔC/C	Within ±25% of the initial value					
		tan δ	≤ 2 times the initial specified value					
		LC	≤ The initial specified value					

Dimensions

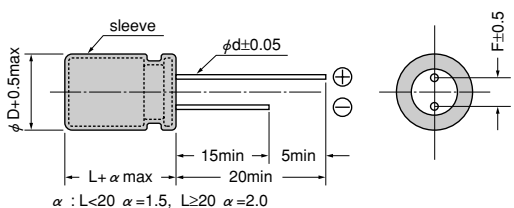

(Unit : mm)

φD	5	6.3	8	10	12.5	16
F	2.0	2.5	3.5	5.0	5.0	7.5
φd	0.5	0.5	0.6	0.6	0.6	0.8

Size List, Impedance, Rated Ripple Current

Items	V	6.3			10		
		Capacitance (μF)	Impedance(Ωmax) (20°C/100kHz)	Rated ripple current(mArms) (105°C/10k to 200kHz)	Capacitance (μF)	Impedance(Ωmax) (20°C/100kHz)	Rated ripple current(mArms) (105°C/10k to 200kHz)
ME-CA	5×11	220	0.50	180			
ME-CX	6.3×11	330	0.30	280	220	280	
ME-AX	6.3×11	470	0.24	280	330	280	
ME-WX	8×11.5	1000	0.15	560	470	410	
ME-WA	10×12.5				1000	710	
ME-WL	10×16	2200	0.066	950			
ME-SWG	10×20	3300	0.047	1150	2200	1150	
ME-WG	12.5×20	4700	0.042	1460	3300	1460	
ME-PX	12.5×25	6800	0.031	1780	4700	1780	
ME-HPC-HPD	16×25	10000	0.026	2000	6800	2000	
ME-FC-FD	16×31.5				10000	2200	
ME-FAZ	16×35.5	15000	0.022	2200			


Size List, Impedance, Rated Ripple Current

V Items Case size φDxL(mm)	16			25		
	Capacitance (μF)	Impedance(Qmax) (20°C/100kHz)	Rated ripple current(mArms) (105°C/10k to 200kHz)	Capacitance (μF)	Impedance(Qmax) (20°C/100kHz)	Rated ripple current(mArms) (105°C/10k to 200kHz)
5×11	100	0.50	180			
6.3×11	220	0.24	280	100	0.30	280
8×11.5	330	0.16	410	220	0.16	410
8×11.5	470	0.15	560	330	0.15	560
10×12.5				470	0.086	710
10×16	1000	0.066	950			
10×20				1000	0.047	1150
12.5×20	2200	0.042	1460			
12.5×25	3300	0.035	1780	2200	0.035	1780
16×25	4700	0.026	2000	3300	0.026	2000
16×31.5	6800	0.022	2200	4700	0.022	2200

V Items Case size φDxL(mm)	35			50		
	Capacitance (μF)	Impedance(Qmax) (20°C/100kHz)	Rated ripple current(mArms) (105°C/10k to 200kHz)	Capacitance (μF)	Impedance(Qmax) (20°C/100kHz)	Rated ripple current(mArms) (105°C/10k to 200kHz)
5×11				2.2	3.0	45
5×11				3.3	2.7	55
5×11				4.7	2.0	90
5×11				10	1.7	110
5×11	33	0.72	180	22	1.2	120
5×11	47	0.50	180	33	0.95	130
6.3×11	100	0.24	280	47	0.56	190
8×11.5	220	0.15	560	100	0.30	320
10×12.5	330	0.086	710	220	0.16	520
10×16	470	0.066	950	330	0.12	670
10×20				470	0.088	820
12.5×20	1000	0.042	1460			
12.5×25				1000	0.053	1200
16×25	2200	0.026	2000			
16×31.5				2200	0.029	1750
16×35.5	3300	0.022	2200			

Please refer to page 15 for the ripple current frequency coefficient.

Model No.



- CE-BJ
- CE-BE
- CE-BD
- CE-BSS
- CE-BS
- CE-FE
- CE-FD
- CE-LD
- CE-FSS
- CE-FU
- CE-FS
- CE-FH
- CE-GA
- CE-AX
- CE-KX
- CE-LX
- CE-LS
- CE-LH
- CE-LL
- CE-PC
- CE-PH
- CE-NP
- CE-FN
- ME-SWB
- ME-UZ-SZ
- ME-UAX-SAX
- ME-LS
- ME-HC
- ME-CZ
- ME-CA
- ME-CX
- ME-AX
- ME-WX
- ME-WA
- ME-WL
- ME-SWG
- ME-WG
- ME-PX
- ME-HPC-HPD
- ME-FC-FD
- ME-FAZ
- ME-FH
- ME-SWN
- ME-HWN