

CE-FH Series

Long Life





- 105°C 2,000 to 5,000hours
- Solvent proof (within 2 minutes)
- AEC-Q200

Specifications

Items	Condition	Specifications						
Rated voltage (V)	—	6.3	10	16	25	35	50	
Surge voltage (V)	Room temperature	8.0	13	20	32	44	63	
Category temperature range (°C)	—	-40 to +105						
Capacitance tolerance (%)	120Hz/20°C	M : ±20						
Dissipation Factor (tan δ)	tanδ (max.) 120Hz/20°C	0.30	0.24	0.20	0.16	0.14	0.14	
		Exceeding 1,000μF, +0.02 every 1,000μF						
Leakage current (LC)	μA/after 2minutes (max.)	The greater value of either 0.01CV or 3						
Impedance ratio at low temperature	Based on the value at 120Hz, +20°C	-25°C Z/Z _{20°C}	4	3	2	2	2	2
		-40°C Z/Z _{20°C}	8	6	4	4	3	3
Endurance	105°C rated voltage applied (With the rated ripple current)	Test	φ4 to φ6.3 : 2,000hours, φ8 to φ10 : 3,000hours, φ12.5 to φ16 : 5,000hours					
		ΔC/C	Within ±25% of the initial value					
		tanδ	Less than 250% of the specified value					
		LC	Less than the specified value					

Marking, Dimensions

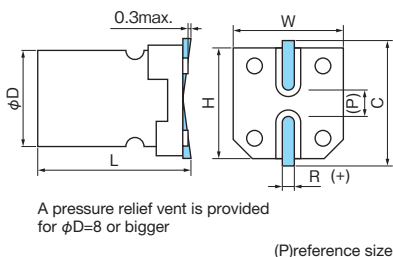

(Unit : mm)

D ^{+0.5}	L ^{+0.3}	W ^{+0.2}	H ^{+0.2}	C ^{+0.2}	R	P
4	6.0	4.3	4.3	5.0	0.5 to 0.8	1.0
5	6.0	5.3	5.3	6.0	0.5 to 0.8	1.4
6.3	6.0	6.6	6.6	7.3	0.5 to 0.8	2.2
6.3	7.7	6.6	6.6	7.3	0.5 to 0.8	2.2
8	10.2	8.3	8.3	9.0	0.7 to 1.0	3.2
10	10.2	10.3	10.3	11.0	1.0 to 1.4	4.6
12.5	13.5 ^{+0.5}	12.8	12.8	13.5	1.0 to 1.4	4.6
16	16.5 ^{+0.5}	16.3	16.3	17.3	1.7 to 2.1	7.0

Size, Rated Ripple Current



μF \ V	6.3	10	16	25	35	50
1.0						4×6.0 7
2.2						4×6.0 11
3.3						4×6.0 13
4.7				4×6.0 13	4×6.0 15	5×6.0 19
10			4×6.0 18	5×6.0 23	5×6.0 25	6.3×6.0 32
22	4×6.0 22	5×6.0 27	5×6.0 30	6.3×6.0 42	6.3×6.0 44	6.3×7.7 60
33	5×6.0 30	5×6.0 35	6.3×6.0 44	6.3×6.0 58	6.3×7.7 77	8×10.2 140
47	5×6.0 36	6.3×6.0 46	6.3×6.0 60	6.3×7.7 91	8×10.2 150	8×10.2 150
100	6.3×6.0 67	6.3×6.0 125	6.3×7.7 95	8×10.2 150	8×10.2 160	10×10.2 220
220	6.3×7.7 105	8×10.2 175	8×10.2 175	8×10.2 195	10×10.2 290	12.5×13.5 340
330	8×10.2 195	8×10.2 195	8×10.2 210	10×10.2 290	12.5×13.5 380	
470	8×10.2 210	8×10.2 210	10×10.2 290	12.5×13.5 400		16×16.5 610
680		10×10.2 300		12.5×13.5 415		
1000	10×10.2 300		12.5×13.5 440		16×16.5 620	
1500		12.5×13.5 480		16×16.5 720		
2200	12.5×13.5 490		16×16.5 785			
3300		16×16.5 820				
4700	16×16.5 860					

Please refer to page 14 for ripple current frequency coefficients.

 Case size: φD×L(mm)
16×16.5:CE-FHT

 Rated ripple current
mA Arms (120Hz, 105°C)

Part number

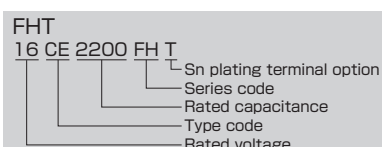
 Surface Mount Type
Aluminum Electrolytic Capacitors

- CE-BE
- CE-BD
- CE-BS
- CE-BSS
- CE-FE
- CE-LD
- CE-FSS
- CE-FS
- CE-FS (High Voltage)
- CE-FH
- CE-AX
- CE-KX
- CE-ZX
- CE-ZC
- CE-LX
- CE-GA
- CE-LS
- CE-LH
- CE-LH (High Voltage)
- CE-LL
- CE-LF
- CE-PC
- CE-PH
- CE-PS
- CE-PF
- CE-TH
- CE-JX
- CE-NP
- CE-FN