

HVPY Series

125°C

High Ripple Current




- 125°C 4,000hours
- Solvent proof (within 2 minutes)
- AEC-Q200

Specifications

Items	Condition	Specifications	
Rated voltage (V)	—	25	35
Surge voltage (V)	Room temperature	32	44
Category temperature range (°C)	—	-55 to +125	
Capacitance tolerance (%)	120Hz/20°C	M : ±20	
Dissipation Factor (tan δ)	tanδ (max.) 120Hz/20°C	0.14	0.12
Leakage current (LC)	μA/after 2minutes (max.), 20°C	0.01CV	
Endurance	125°C, 4,000hours rated voltage applied (With the rated ripple current)	ΔC/C	Within ±30% of the initial value
		tanδ	Less than 200% of the specified value
		ESR	Less than 200% of the specified value
		LC	Less than the specified value

Marking, Dimensions

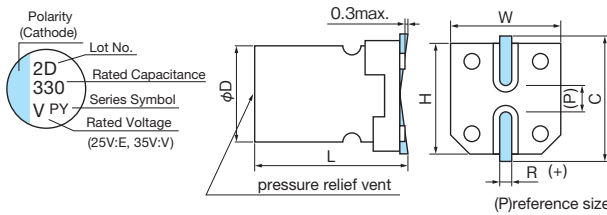

(Unit : mm)

D ^{±0.5}	L ^{±0.3}	W ^{±0.2}	H ^{±0.2}	C ^{±0.2}	R	P
10	10.5	10.3	10.3	11.0	1.0 to 1.4	4.6
10	12.5	10.3	10.3	11.0	1.0 to 1.4	4.6

Size, ESR, Rated Ripple Current

μF	V	25			35		
270					10×10.5	18	4000
330		10×10.5	18	4000	10×12.5	14	4700
470		10×12.5	14	4700			

Please refer to page 18 for ripple current frequency coefficients.

Case size: φDxL(mm)

Rated ripple current
mA Arms (100kHz, 125°C)

ESR(mΩ)max. at 100kHz, 20°C

Part number

