

ME-HC Series

Standard



ME-CZ (P.80)

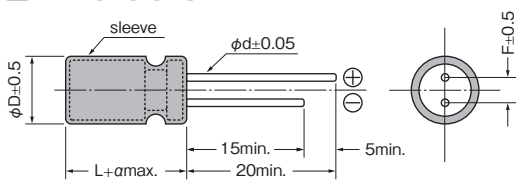
↑ 105°C

- Solvent proof (within 5 minutes)

Specifications

Items	Condition	Specifications								
Rated voltage (V)	—	6.3	10	16	25	35	50	63	100	
Surge voltage (V)	Room temperature	8.0	13	20	32	44	63	79	125	
Category temperature range (°C)	—	-40 to +85								
Capacitance tolerance (%)	120Hz/20°C	M : ±20								
Dissipation Factor (tan δ)	tanδ(max.) 120Hz/20°C	0.28	0.24	0.20	0.16	0.14	0.12	0.10	0.10	
		Exceeding 1,000μF, +0.02 every 1,000μF								
Leakage current(LC)	μA/after 2minutes (max.)	The greater value of either 0.01CV or 3								
Impedance ratio at low temperature	Based on the value at 120Hz, +20°C	-25°C Z/Z _{20°C}	5	4	3	2	2	2	2	2
		-40°C Z/Z _{20°C}	12	10	8	6	4	4	4	4
Endurance	85°C, 2,000hours rated voltage applied (With the rated ripple current)	ΔC/C	Within ±25% of the initial value							
		tanδ	Less than 200% of the specified value							
		LC	Less than the specified value							

Dimensions


 $\alpha : L < 20 \quad \alpha = 1.5, L \geq 20 \quad \alpha = 2.0$

 A pressure relief vent is provided for $\phi D = 6.3$ or bigger

(Unit : mm)

ϕD	5	6.3	8	10	12.5	16	18
F	2.0	2.5	3.5	5.0	5.0	7.5	7.5
ϕd	0.5	0.5	0.6	0.6	0.6	0.8	0.8

Size, Rated Ripple Current

μF \ V	6.3	10	16	25	35	50	63	100	
2.2						5x11	20	5x11	30
3.3						5x11	28	5x11	40
4.7				5x11	25	5x11	38	5x11	50
10			5x11	28	5x11	40	5x11	45	5x11
22		5x11	38	5x11	50	5x11	60	5x11	75
33	5x11	50	5x11	58	5x11	60	5x11	80	5x11
47	5x11	60	5x11	70	5x11	85	5x11	90	5x11
100	5x11	120	5x11	125	5x11	165	6.3x11	180	6.3x11
220	5x11	210	5x11	210	6.3x11	260	8x11.5	320	8x11.5
330	6.3x11	260	6.3x11	295	8x11.5	360	8x11.5	380	10x12.5
470	6.3x11	330	6.3x11	330	8x11.5	380	10x12.5	540	10x16
1000	8x11.5	420	10x12.5	620	10x16	740	10x20	940	12.5x20
2200	10x16	890	10x20	1000	12.5x20	1150	12.5x25	1350	16x25
3300	10x20	1080	12.5x20	1300	12.5x25	1500	16x25	1600	16x35.5
4700	12.5x20	1400	12.5x25	1550	16x25	1750	16x31.5	1900	18x35.5
6800	12.5x25	1600	16x25	1800	16x31.5	1900	18x35.5	2000	
10000	16x25	1750	16x31.5	1900	18x35.5	2000			
15000	16x35.5	1900	18x35.5	2000					

Please refer to page 14 for ripple current frequency coefficients.

 Case size: $\phi D \times L$ (mm)

 Rated ripple current
mA Arms (120Hz, 85°C)

Part number

