

HVPC Series

125°C

High Capacitance



- 125°C 4,000hours
- Solvent proof (within 2 minutes)
- AEC-Q200

UP GRADE

Specifications

Items	Condition	Specifications		
Rated voltage (V)	—	16	25	35
Surge voltage (V)	Room temperature	20	32	44
Category temperature range (°C)	—	-55 to +125		
Capacitance tolerance (%)	120Hz/20°C	M: ±20		
Dissipation Factor (tan δ)	tan δ (max.) 120Hz/20°C	0.16	0.14	0.12
Leakage current (LC)	μ A/after 2 minutes (max.), 20°C	0.01CV		
Endurance	125°C, 4,000hours rated voltage applied (With the rated ripple current)	Δ C/C	Within ±30% of the initial value	
		tan δ	Less than 200% of the specified value	
		ESR	Less than 200% of the specified value	
		LC	Less than the specified value	

Marking, Dimensions

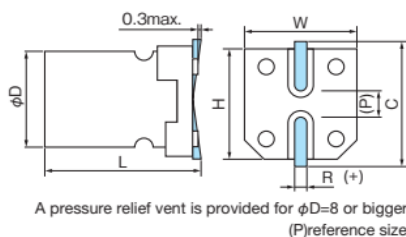

(Unit: mm)

D ±0.5	L ±0.3	W ±0.2	H ±0.2	C ±0.2	R	P
5	6.0	5.3	5.3	6.0	0.5 to 0.8	1.4
6.3	6.0	6.6	6.6	7.3	0.5 to 0.8	2.2
6.3	7.7	6.6	6.6	7.3	0.5 to 0.8	2.2
8	10.5	8.3	8.3	9.0	0.7 to 1.0	3.2
10	10.5	10.3	10.3	11.0	1.0 to 1.4	4.6
10	12.5	10.3	10.3	11.0	1.0 to 1.4	4.6

Size, ESR, Rated Ripple Current

μF \ V	16		25		35	
33					5 × 6.0	100 750
56			5 × 6.0	80 850	6.3 × 6.0	60 1200
100			6.3 × 6.0	50 1300	6.3 × 7.7	35 1700
150			6.3 × 7.7	30 1800		
180					8 × 10.5	27 2000
220	6.3 × 7.7	30 1800				
270			8 × 10.5	27 2000		
330					10 × 10.5	20 2800
390					10 × 12.5	17 3000
470	8 × 10.5	27 2000	10 × 10.5	20 2800		
560			10 × 12.5	16 3000		
820	10 × 10.5	20 2800				

Case size: φ D × L (mm) —
 ESR (mΩ) max. at 100kHz, 20°C —
 Rated ripple current
 mA rms (100kHz, 125°C)

Part number

